


Conducto Circular Helicoidal Acero Galvanizado

SOMBRESEROS GALVANIZADOS

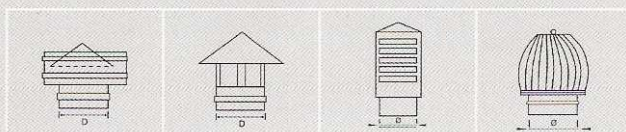

Ø Diámetro	Antirregolfante	Chino	Venturi	Giratorio
100	21,24	17,69	36,10	
125	22,26	18,65	34,76	74,00
135	23,32	21,05	36,32	
150	36,00	21,20	37,77	78,68
175	26,03	23,07	41,13	
200	27,04	23,96	44,38	81,89
250	34,46	30,89	63,81	86,08
300	37,86	34,47	76,89	90,91
400	57,93	51,67	116,81	
500	80,00	71,73	157,75	


VENTILACION VERTICAL CAMPANAS / CALDERAS

Ø Diámetro	€/MI
100	26,94
125	27,57
135	29,83
150	30,92
175	33,31
200	37,28
250	44,27
300	50,87
400	69,22
500	87,69

Material conductos HELICOIDAL según norma UNE-23-093-81 (400° 2h) con exp. nº 99011795M1, según la certificación LGAI.

*Espesor de chapa 0,5 mm recomendado para aire.

TUBO HELICOIDAL GALV/ INOX.

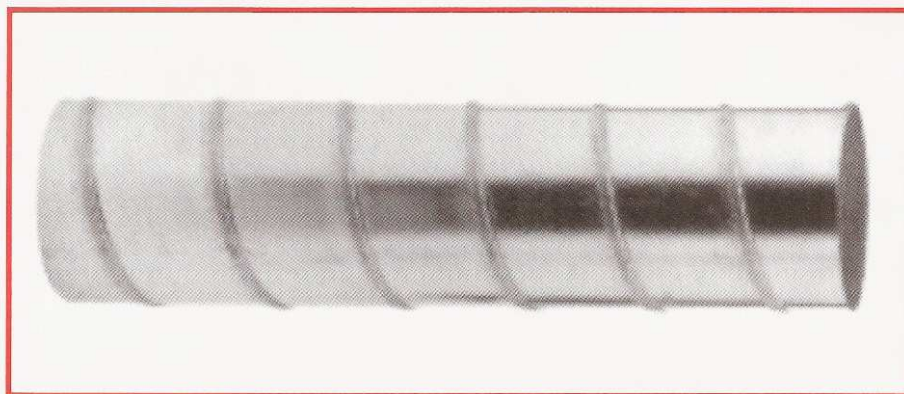

AUTOCONECTABLE MACHO-HEMBRA GALV/INOX.

